



▶ Product Appearance



▶ Product Size

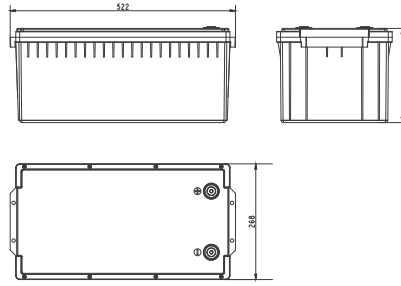

▶ Packaging Size

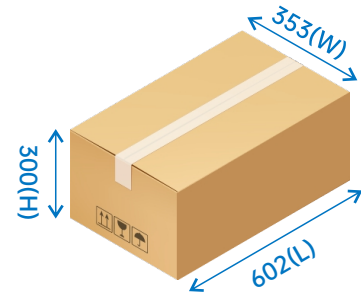

Net Weight: 23.1±0.5kg

Gross Weight: 25.6±0.5kg


▶ Features

- A grade brand new prismatic LiFePO₄ cells
- Cell balance function
- ≥4000 cycles @80% DOD(25°C, 0.5C)
- IP65 superior safety
- Over charge, over discharge, over temperature, low temperature, over current and short circuit protection
- Certificate: UN38.3, MSDS, IEC62619、CE-RED、ROHS、E-mark
- Easy installation and maintenance free
- Supports series and parallel connection
- Charging Heating Technique
- Supports Bluetooth communication


▶ Technical Specifications

Model	LFP2.56KWH12.8V-P65L2GF40
Battery Type	LiFePO ₄
Nominal Voltage (V)	12.8
Nominal Capacity (AH)	205
Energy (WH)	2624
Pack Mode	4S1P
Continuous Discharge Current (A)	150
Charge Cut-off Voltage (V)	14.4
Discharge Cut-off Voltage (V)	10.4
Max.Charge Current (A)	150
Max.Discharge Current (A)	200
Peak Discharge Current (A)	240A@10S 300A@2S
Recommend Discharge Current (A)	100
Recommend Discharge Depth (%)	80
Cycle Life	≥4000 cycles (25°C, 0.5C) 80% DOD
Communication	Bluetooth
Charge&Discharge Temperature(°C)	Charge: 0°C~+50°C / Discharge: -20°C~+60°C
Optimal Storage Temperature(°C)	5°C ~ +35°C
Recommend Storage Humidity	60%±20% RH
Terminal	M8
Dimensions (L*W*H) (mm)	522*268*218
Weight (Kg)	23.1±0.5
Certificate	UN38.3, MSDS, IEC62619、CE-RED、ROHS、E-mark
IP Class	IP65


Different Rate Discharge Curve@25°C

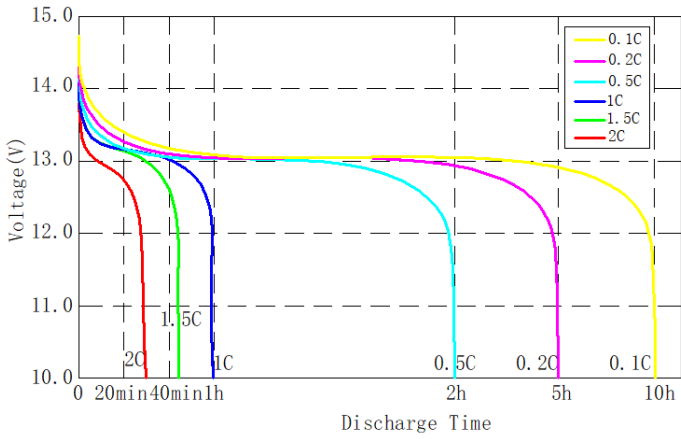


Different Temperature Discharge Curve@0.5C

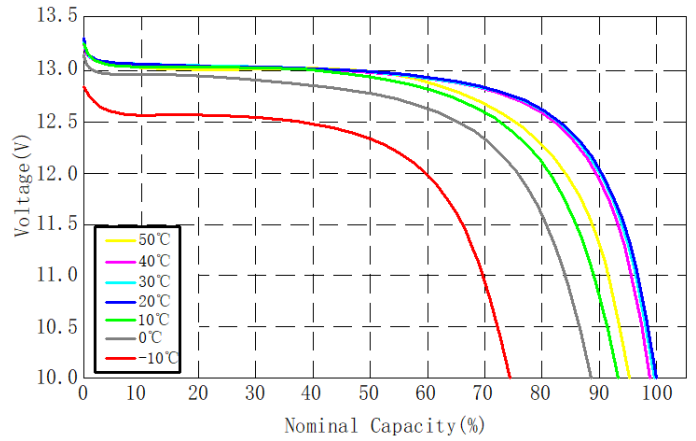


State of Charge Curve@0.5C 25°C

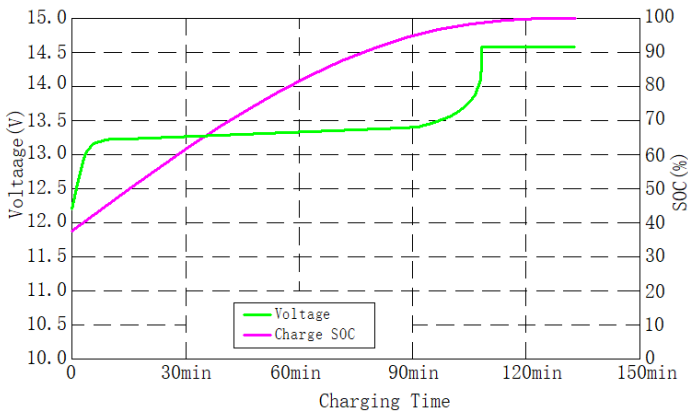

Charging Characteristics @0.5C 25°C

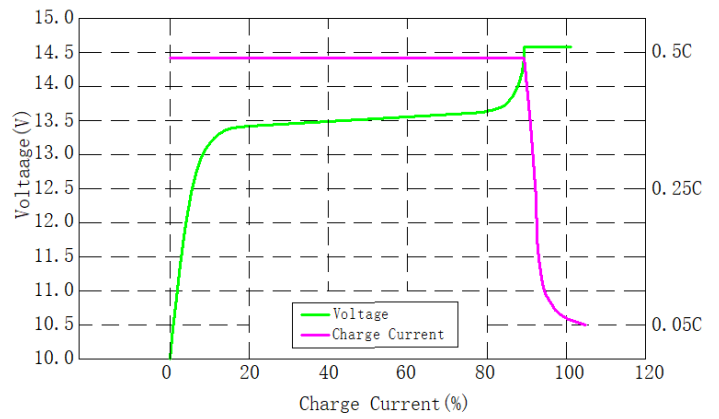

Different DOD Discharge Cycle Life Curve@0.5C 25°C

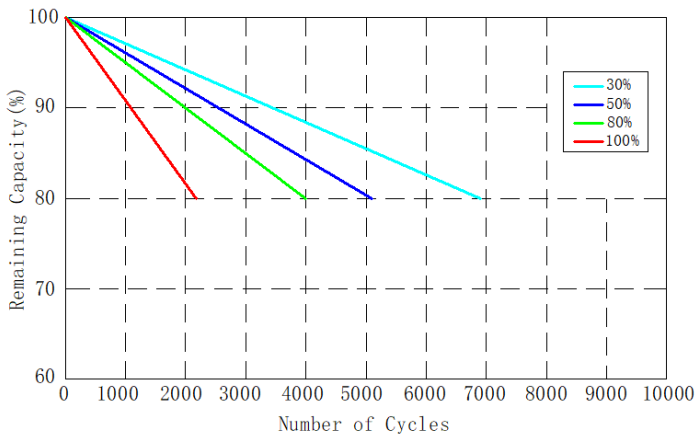

Different Temperature Self Discharge Curve

