




# SUNSYNK-G5.3

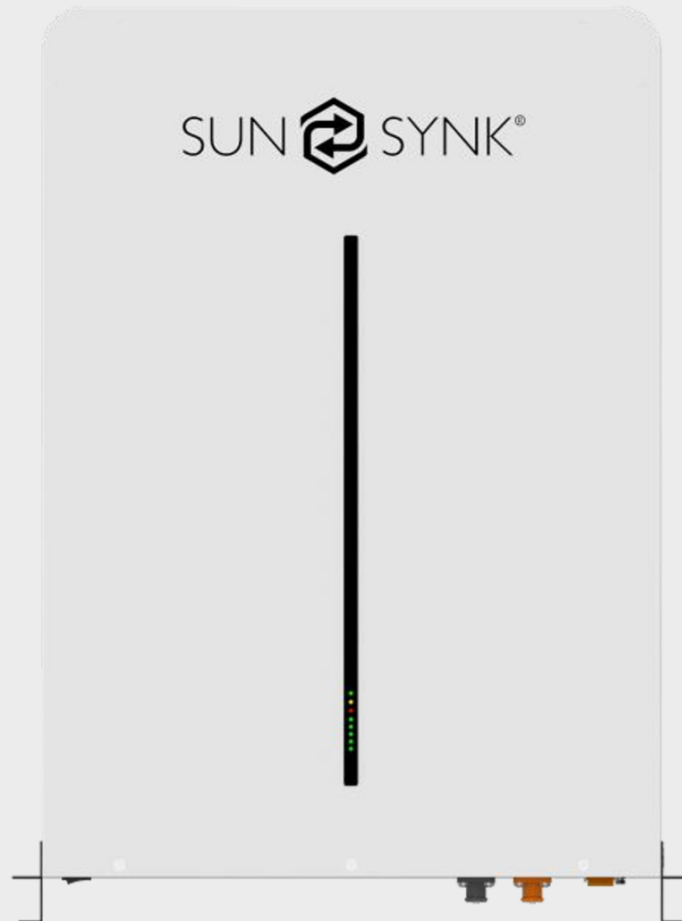

## DATASHEET

Room 702-704, 7/F Texwood Plaza, 6 How Ming Street,  
Kwun Tong, Kowloon, Hong Kong

Tel: +852 2884 4318 Fax: +8522884 4816

[www.sunsynk.com](http://www.sunsynk.com) / [sales@sunsynk.com](mailto:sales@sunsynk.com)

Model		SUNSYNK-G5.3
<b>Main Parameter</b>		
Battery Chemistry		Lithium Ferro Phosphate (LifePO4 or LFP)
Capacity		104 Ah
Scalability		Max. 32 pcs in parallel (170kWh)
Nominal Voltage		51.2 V
Operating Voltage		43.2~57.6 V
Energy		5.32 kWh
Usable Energy <sup>[1]</sup>		4.79 kWh
Charge/Discharge Current	Recommend <sup>[2]</sup>	50 A
	Max. <sup>[2]</sup>	100 A
	Peak (2mins,25°C)	150 A
<b>Other Parameter</b>		
Recommend Depth of Discharge		90%
Dimension (W/H/D)		440*600*133.2 mm (don't include Circuit Breaker, terminals and hanging boards)
Weight		44 kg
Master LED Indicator		5 LED (SOC 20%~100%)
		3 LED (working, alarming, protecting)
IP Rating of Enclosure		IP20
Working Temperature		Charge: 0°C ~ +55°C (optional heating: -20°C~+55°C) Discharge: -20°C ~ +55°C
Storage Temperature		-20°C ~ +35°C
Humidity		5% ~ 95%
Altitude		≤2000m
Cycle Life		≥6000 (25±2°C, 90%DOD, 0.5C/0.5C, 70%EOL)
Installation		Wall Mounted (Support 19-inch standard cabinet)
Communication Port		CAN2.0, RS485
Life Cycle Power During Warranty Period <sup>[3]</sup>		16MWh@70%EOL
Certification		CE, UK, UN38.3

<sup>[1]</sup>DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

<sup>[2]</sup> The current is affected by temperature and SOC.

<sup>[3]</sup> The warranty is due whichever reached first of warranty period or energy throughout.



DC 125A Circuit Breaker





## CONTACT US

Email us: [sales@sunsynk.com](mailto:sales@sunsynk.com) Call us UK: +44 151 8324300

VAT Number: 175669460

UK Address: Sunsynk, 17 Turnstone business park,  
Mulberry Avenue. Widnes, Cheshire, WA8 0WN.

GlobalTech Ltd

