


## Twister® Wire Connectors

## WeatherProof® Wire Connectors

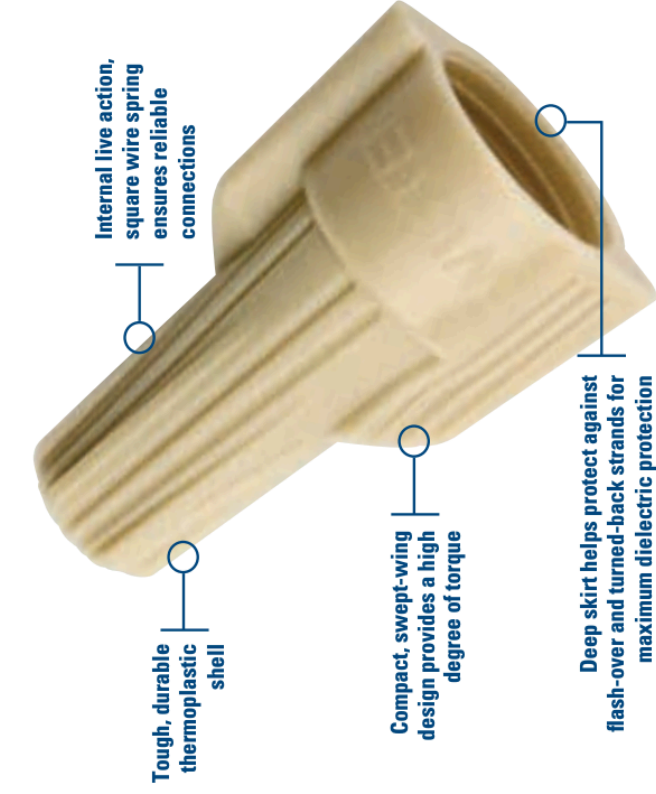

Tough, durable thermoplastic shell


Compact, swept-wing design provides a high degree of torque

Internal live action, square wire spring ensures reliable connections

Deep skirt helps protect against flash-over and turned-back strands for maximum dielectric protection

The No.1 twist-on wire connector. The Twister® easily handles the most common wiring tasks. A patented, expanding square-wire spring always ensures a quick, safe connection.

- Accept solid, stranded and flexible wires
- Cost effective replacement for terminal blocks
- BS 7671:2008 (17<sup>th</sup> Edition) compliant
- Fully re-useable

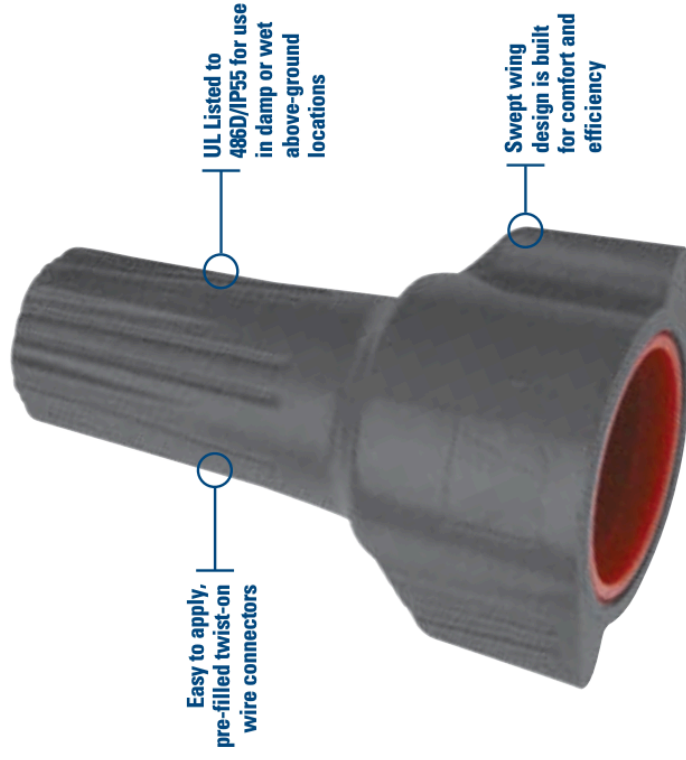

Easy to apply, pre-filled twist-on wire connectors

UL Listed to 486D/IP55 for use in damp or wet above-ground locations

Swept wing design is built for comfort and efficiency

Designed specifically for above ground, interior/exterior connections exposed to damp/wet and corrosive environments. WeatherProof® connectors are pre-filled with a non-hardening, silicone-based gel that protects against moisture and corrosion.

- IP55 rated for use in damp/wet locations
- Tough, UL 94V-2 flame-retardant shell rated at 105°C (221°F)
- BS 7671:2008 (17<sup>th</sup> Edition) compliant

### Ordering Information

Model	Colour	Wire Combinations	Quantity	Cat. No.	Rating
340®	Lt. Blue	0.5mm <sup>2</sup> to 4.0mm <sup>2</sup> Min. 2 x 0.5mm <sup>2</sup> Max. 2 x 4.0mm <sup>2</sup>	Box of 100	<b>30-340</b>	32A / 450V
341®	Tan	0.5mm <sup>2</sup> to 6.0mm <sup>2</sup> Min. 3 x 0.5mm <sup>2</sup> Max. 2 x 6.0mm <sup>2</sup>	Box of 100	<b>30-341</b>	41A / 600V
342®	Grey	2.5mm <sup>2</sup> to 10.0mm <sup>2</sup> Min. 3 x 2.5mm <sup>2</sup> Max. 2 x 10.0mm <sup>2</sup>	Box of 50	<b>30-342</b>	57A / 600V
344®	Red/ Yellow	0.5mm <sup>2</sup> to 4.0mm <sup>2</sup> Min. 3 x 0.5mm <sup>2</sup> Max. 4 x 4.0mm <sup>2</sup>	Box of 50	<b>30-144</b>	32A / 600V

### Ordering Information

Model	Colour	Wire Combinations	Quantity	Cat. No.	Rating
61	Grey/Orange	1.5mm <sup>2</sup> to 2.5mm <sup>2</sup> Min. 1 x 1.5mm <sup>2</sup> / Max. 2 x 2.5mm <sup>2</sup>	Card of 25	<b>30-1161</b>	24A/450V (IP55)
62	Grey/Red	1.5mm <sup>2</sup> to 4.0mm <sup>2</sup> Min. 2 x 1.5mm <sup>2</sup> / Max. 4 x 4.0mm <sup>2</sup>	Card of 20	<b>30-1162</b>	32A /450V (IP55)
63	Grey/Dr. Blue	2.5mm <sup>2</sup> to 4.0mm <sup>2</sup> Min. 3 x 2.5mm <sup>2</sup> / Max. 6 x 4.0mm <sup>2</sup>	Card of 15	<b>30-1163</b>	32A /450V (IP55)